

## Avia™ 12x8 Digital Signal Processor

- > Engineered to deliver exceptional pro audio performance with faster, easier implementation
- > Ready to go out of the box and extensively configurable
- > Hybrid channel strip architecture
- > Customizable inputs and outputs
- > Eight internal aux buses
- > Clean and intuitive software
- > Real-time configuration and adjustment
- > Work offline or live via Ethernet or USB
- > Native Crestron system integration for rapid programming<sup>[1]</sup>
- > Highest-quality converters, preamps, and line amps
- > Twelve mic/line inputs with 66 dB gain range
- > Eight +24 dB balanced line outputs
- > Internal universal power supply
- > Single-space 19" rack mountable



The Crestron® Avia™ family of digital signal processors leverages the highest quality components and the expertise of veteran audio industry engineers to deliver a revolutionary audio processing platform that's easy to integrate and configure. It has all the features and performance top sound system designers demand — complemented with an intuitive graphical workspace conceived to inspire exceptional results quickly.

Delivering quality sound in any meeting space, performance venue, courtroom, sports facility, or house of worship demands high-performance, professional audio signal processing. A good digital signal processor (DSP) must deliver sophisticated processing, mixing, and routing for all types of audio signals with a comprehensive set of controls and adjustments to manage the behavior and sound quality of each signal. Until now, DSP products have been either limited in their functionality and flexibility or too complicated and time consuming to implement economically. With Avia, Crestron has addressed all of those concerns.

### Avia Audio Tool Software

Rapid system configuration and adjustment is enabled using the Avia Audio Tool software. Its clean, modern user interface provides a workspace that's easy and intuitive to navigate. The Avia Audio Tool allows setup and operation to be performed live over a USB or LAN connection, or “virtual DSPs” can be configured offline and uploaded locally or remotely.

### Crestron Control® Integration<sup>[1]</sup>

Avia offers native Crestron control system integration to substantially reduce the amount of programming required. It even eliminates much of the touch screen UI design work by allowing components within the Avia Audio Tool to be selected and exported as a Smart Graphics™ file containing ready-to-use SmartObject® touch screen controls and meters. In fact, along with a variety of buttons and sliders, Avia supports up to 32 real-time VU meters running simultaneously on a touch screen. With minimal programming, a system integrator can provide their customer with a touch screen control solution custom tailored to their needs, with anything from a few selectable presets and volume controls to a complete virtual mixing console.

The Avia DSP family comprises five models designed to address a full range of applications:

Model	Analog Mic/Line Inputs	+24 dB Analog Outputs	Internal Auxiliary Buses	Acoustic Echo Cancellation	SIP/POTS Phone Interface	8x8 USB Audio I/O	32x32 Dante™ I/O	Front Panel Meters
DSP-860	8	6	8					
<b>DSP-1280</b>	<b>12</b>	<b>8</b>	<b>8</b>					
DSP-1281	12	8	8				•	•
DSP-1282	12	8	8	•	•	•		
DSP-1283	12	8	8	•	•	•	•	•

# DSP-1280 Avia™ 12x8 Digital Signal Processor



Front View



Rear View

## SPECIFICATIONS

### Audio - General

**Analog-To-Digital Conversion:** 24-bit 48 kHz  
**Digital-To-Analog Conversion:** 24-bit 48 kHz  
**Frequency Response:** 20 Hz to 20 kHz  $\pm 0.5$  dB  
**THD:** 0.001%, 20 Hz to 20 kHz, 0 dB gain, +4 dBu input;  
0.01%, 22 Hz to 22 kHz, 54 dB gain, -50 dBu input  
**EIN:** -125 dBu, 22 Hz to 22 kHz, no weighting  
**Dynamic Range:** 110 dB, 22 Hz to 22 kHz, 0 dB gain  
**Crosstalk:** -85 dB, 1 kHz, +4 dBu input, channel to channel  
-75 dB, 1 kHz, -50 dBu input, channel to channel  
**Latency:** 3.0 ms (analog in to analog out)

### Communications

**Ethernet:** 10/100/1000 Mbps, auto-switching, auto-negotiating, auto-discovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, SSH, SFTP (SSH File Transfer Protocol)  
**USB Device:** USB device port for computer console (setup)

### Connectors

**MIC/LINE INPUTS 1 – 12:** (12) 3-pin 3.5 mm detachable terminal blocks; Balanced microphone/line-level audio inputs;  
**Input Level:** +24 dBu maximum;  
**Gain Range:** 66 dB;  
**Input Impedance:** 10k Ohms balanced;  
**Phantom Power:** +48 Volts DC, 12 mA, software enabled/disabled per channel

**LINE OUTPUTS 1 – 8:** (8) 3-pin 3.5 mm detachable terminal blocks; Balanced/unbalanced line-level audio outputs;  
**Output Level:** +24 dBu maximum;  
**Output Impedance:** 150 Ohms balanced

**LAN:** (1) 8-pin RJ45 female;  
10Base-T/100Base-TX/1000Base-T Ethernet LAN port  
**100-240V~1.8A 50/60 Hz:** (1) IEC 60320 C14 main power inlet;  
Mates with removable power cord, included  
**G:** (1) 6-32 screw, chassis ground lug  
**COMPUTER (front):** (USB Type B female);  
USB computer console port (for setup only)

### Controls & Indicators

**PWR:** (1) Bi-color green/amber LED, indicates operating power supplied from AC line power, turns amber while booting and green when operating, alternates colors if no network connection  
**RESET:** (1) Recessed pushbutton, restores last saved settings  
**LAN (rear):** (2) Bi-color green/amber LEDs, indicate Ethernet activity and link status  
**SETUP (rear):** (1) Red LED and (1) pushbutton for Ethernet setup

### Power Requirements

**Main Power:** 1.8 Amps @ 100-240 Volts AC, 50/60 Hz  
**Power Consumption:** 30 Watts typical

### Environmental

**Temperature:** 41° to 104° F (5° to 40° C)  
**Humidity:** 10% to 90% RH (non-condensing)  
**Heat Dissipation:** 102 BTU/hr  
**Ambient Noise Level:** 30 dBA

### Enclosure

**Chassis:** Metal, fan-cooled, vented sides  
**Front Panel:** Metal, black finish with polycarbonate label overlay  
**Mounting:** Freestanding or 1 RU 19-inch rack-mountable (adhesive feet and rack ears included)

# DSP-1280 Avia™ 12x8 Digital Signal Processor

## Dimensions

---

**Height:** 1.72 in (44 cm) without feet  
**Width:** 17.28 in (439 mm);  
19.00 in (483 mm) with rack ears  
**Depth:** 14.35 in (365 mm)

## Weight

---

8.8 lb (4.0 kg)

## MODELS & ACCESSORIES

### Available Models

---

**DSP-1280:** Avia™ 12x8 Digital Signal Processor

### Available Accessories

---

**AMP-8000 Series:** Avia™ Power Amplifiers  
**Avia™ Audio Tool:** DSP Configuration Software

#### Notes:

1. Crestron control system, touch screens, and custom programming are sold separately. A control system is typically required for any installation that includes end-user adjustment or selection of presets, automated interaction with other equipment, and/or monitoring via Crestron Fusion®.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/salesreps](http://www.crestron.com/salesreps) or by calling 800-237-2041.


The specific patents that cover Crestron products are listed online at: [patents.crestron.com](http://patents.crestron.com).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron, the Crestron logo, Avia, Crestron Control, Crestron Fusion, Crestron RL, DigitalMedia, DM, Rava, Smart Graphics, and SmartObject are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dante is either a trademark or registered trademark of Audinate Pty Ltd. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.  
©2016 Crestron Electronics, Inc.

# DSP-1280 Avia™ 12x8 Digital Signal Processor

## DIMENSIONAL DIAGRAM

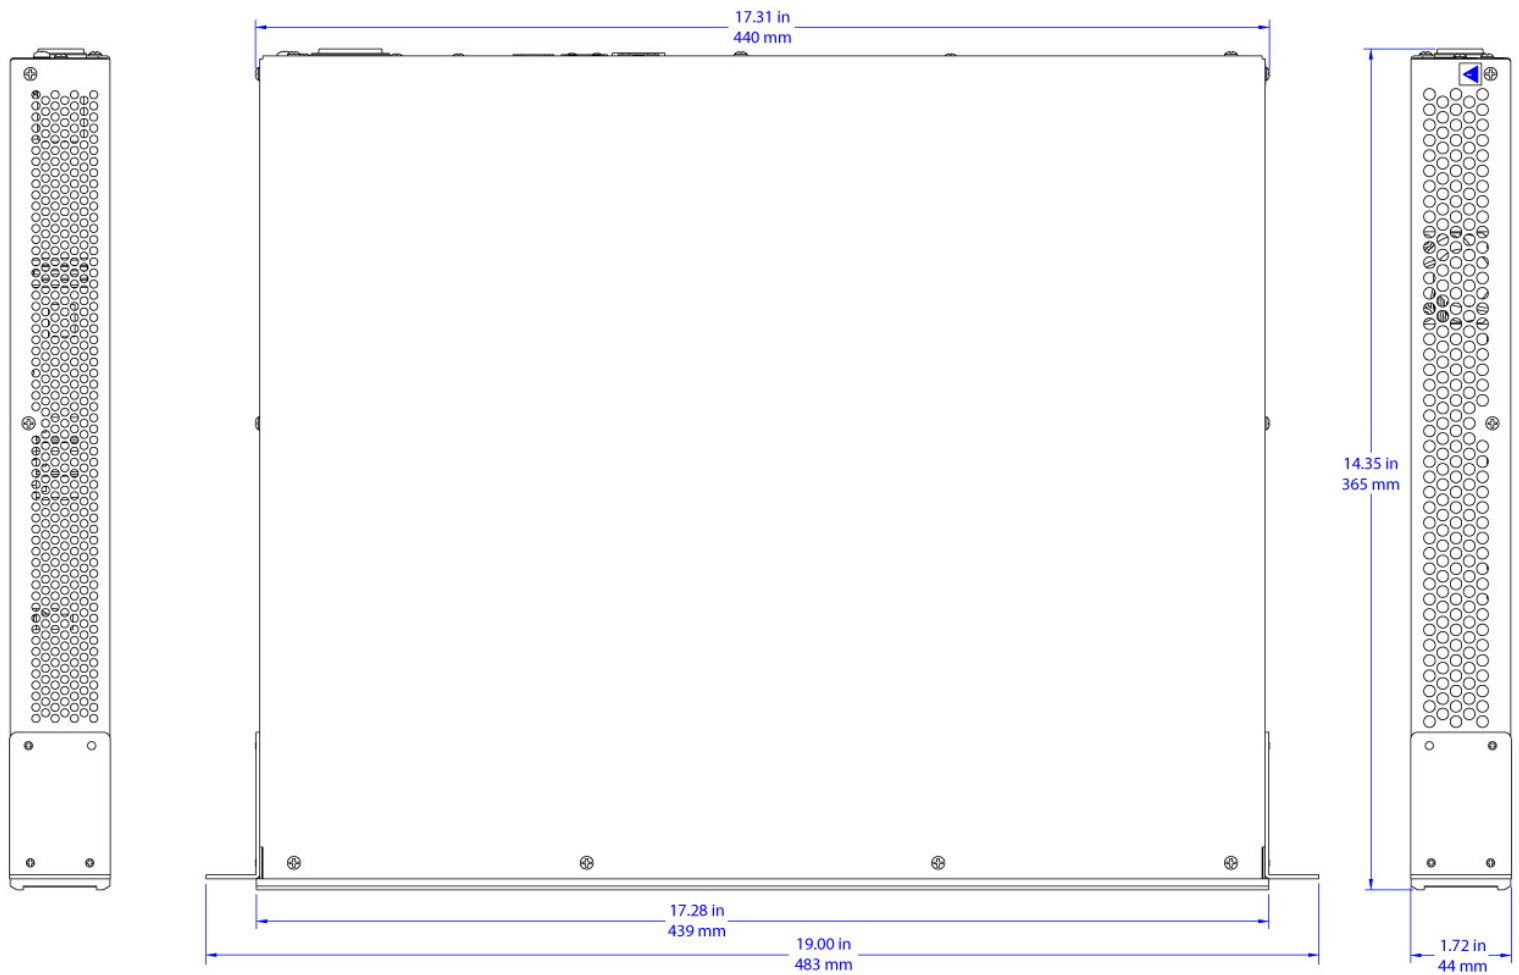

DSP-1280

